

DocuCentre 9000
Digital Multifunction Device



DocuCentre 9000

Building documents with
impressive speed.



High performance, enhanced productivity

The DocuCentre 9000 (DC 9000) has all the signatures of a high performance digital multifunction system. Empowered with high processing abilities to realise its speed, it's also equipped for superior image, reliability and document output capacity to enhance your business productivity.





Besides high specification functions demanded by centralised copy and print applications, it also gives an impressive speed of up to 90 ipm for supported weights (A4 LEF monochrome), high resolution of up to 1200dpi, large output volume, continuous scanning ability and finisher (optional) to give superior finishing, workflow consistency and job flow management. Together with its printer and scanner features for high speed and large volume processing, remarkable improvements in productivity can now be achieved in the office.

High Productivity Copying & Scanning

250 sheet capacity, 90 ipm: 1 pass duplex high speed monochrome scanning. 50ipm colour scanning, 1-sided. High speed copying of 1-sided/2-sided at 90 ipm (Supported weights, A4LEF).

Supreme Image Quality

Printer output resolution: Real 1,200 x 1,200dpi*. Use of environment-friendly Emulsion Aggregation (EA) Toner for crisp text and razor-sharp images required for quality prints.

* when printer is at high resolution mode

High Reliability


DC 9000 is equipped with Wide Range Feeder for all trays to decrease paper jams. This aims to increase productivity through reliability.

High speed scanning

High speed scanning at up to 200 impressions/minute for rapid conversion of large volume of documents into electronic formats. Scanning at a speed of 200 ipm in monochrome (A4 LEF, double-sided) 50 ipm in colour (A4 LEF, single-sided), it provides a conducive environment for converting large volume of hardcopy documents into electronic formats.


Supports A3-size documents and simultaneous scanning of mixed sized originals

A3-size original documents can be scanned at resolutions of 600 x 600dpi, 400 x 400dpi, 300 x 300dpi and 200 x 200dpi. Plus a combination of original documents in A3, B4, A4 and others can be scanned, converted into the same size and saved.

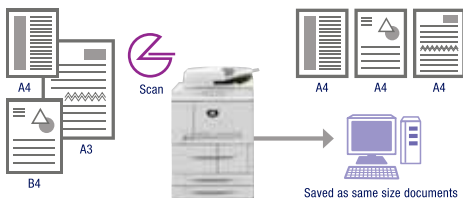


Scanning made easy like copying

Colour scanning can be done by specifying the user PC or server from the control panel for saving the scanned data. It's as simple as copying and the scanned document can be converted into a shared document format, for example, DocuWorks or PDF. The DC9000 simply needs to be connected to an office network supporting SMB and/or FTP protocols.

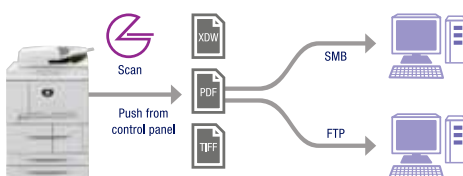

Smoother operations with extended scan-to-mailbox function

Besides the function for exporting scanned documents in a mailbox via the TWAIN application, job assignment to mailboxes can also be done. Making it possible to reduce hassle involved in processing standard scanned documents.

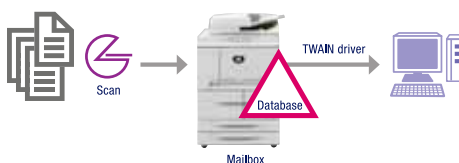

Save scanned documents to mailbox and access from Web browser

Scanned data in the mailbox can be easily accessed from CentreWare Internet Services that uses the Web browser. The list of scanned data can be accessed, exported and deleted when desired.

Scanning hardcopy documents and sending it via email

Scanned documents can be sent as DocuWorks documents or PDF via the email. Email addresses can be searched and obtained from an external LDAP* server, creating an efficient information distribution platform that also helps to reduce cost and labour.

*Lightweight Directory Access Protocol

Multi-send function for simultaneous distribution to multiple PCs and servers during scanning


If the job flow (process procedure) of a scanned hardcopy is registered beforehand, the document can be saved to multiple PCs and servers or sent as email with just one touch. Up to 1,000 job flows can be registered. By matching the network environment with the job requirements, conversion of hardcopy documents into electronic formats and distributing them can be made more efficient.

Changing formats and distribution destination at ease

Job flows can be changed easily. Before scanning, the job flow can be changed to better meet the job requirements using the control panel.


Assigning usage rights


To safeguard security, usage rights of the job flow can be assigned to specific users or divisions by user ID. Alternatively, you can choose to display only the user's job flow among the list of registered job flows.

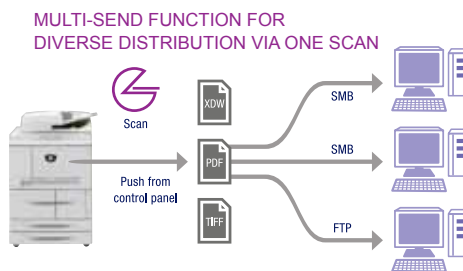

CentreWare Flow Services for advanced document flow

By linking to the software, CentreWare Flow Services (sold separately), a higher level of efficiency through network distribution and storage for hardcopy as well as electronic documents can be achieved. Scanned data saved in the mailboxes can be processed, exported and distributed automatically according to the "process rule" specified in the respective mailboxes. The scanned documents can be processed via the Optical Character Recognition (OCR) and a file name can be assigned based on the OCR result for easy file retrieval in future.

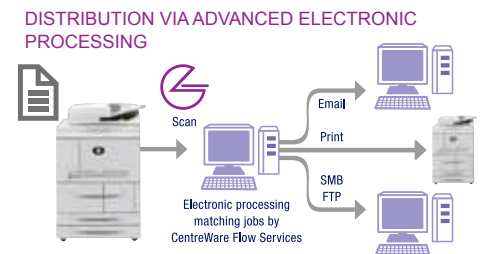

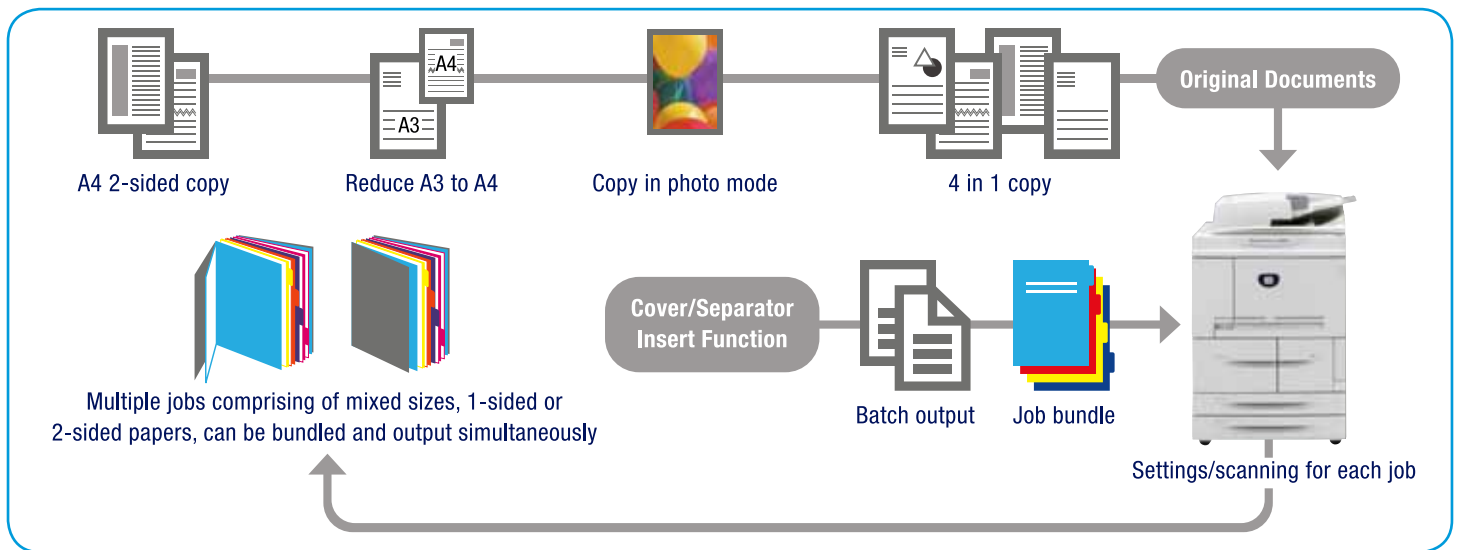

Build Job

With the Build Job feature, finishing settings of original documents scanned and stored onto the DC9000 hard disk can be changed during reprint. When you make copies under the Build Job platform, you get additional functions of “Change Settings” and “Divide by Chapter” when you add in documents.

Document created on the PC can be saved onto the DC9000 hard disk and reprinted

An original document created on the PC can be saved to the hard disk of the DC9000 by instruction from the printer driver. The reprintable documents can be printed by the touch of a button on the control panel. At this time, only the first page will be printed*1 so that the contents of the document can be verified. If multiple reprintable documents are selected, they can be printed in a batch*2. Moreover, the saved settings can be changed before printing.

*1: First page output only when one file is selected
 *2: The feature is available at a later date

Auto Delete after specified date and time

After a specified date and time has elapsed, documents saved in the hard disk will automatically be erased if “auto delete” function is chosen. This helps to free up disk space for storage of new documents when required.

Cover Insertion

Different types of paper (coloured/heavyweight) can be used and copied as the front and back covers to help the completed booklet or document stand out.




Form Integration

The first page of an original document can be saved as the Form Document, then be integrated and copied with pages from the second page onwards.

Annotation

Page numbers, dates, copy prohibition notes and so on can be integrated as stamps when copying. For easier segmentation of meeting materials, page numbers can also be easily

assigned when compiling and copying documents submitted by different workgroups or divisions.

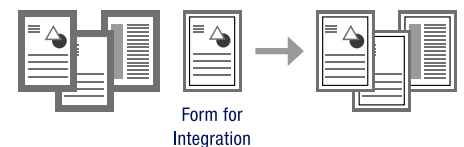

Extract/Delete

Similar to “cut & paste”, you can extract or delete up to three locations on an image within a specified area for your copying.

Copy on index paper

At the click of a button, you can copy on index papers that are frequently used as organising binders. A copied index paper can be set in the interposer and used as a separator.

Reserve tank allows load-while running toner replacement

With a reserve toner tank and a dedicated door, toner replacement can be done without stopping or interrupting the job. What’s more, the high capacity toner cartridge can copy approximately 60,000 sheets*.


* For A4 size documents based on 6% toner coverage per sheet.

Impactful print quality

A network printer for high speed processing of A4 at 90 ipm. The DC9000 is most suitable as a network printer offering you high speed output of A4 at 90 ipm for both 1-sided and 2-sided printing of large volume and concentrated output. What's more, post-processing such as stapling, punching, centre-binding, Z-folding, C-folding and bi-folding can be completed with the optional finishing accessories.


Impactful quality print of Real 1,200dpi

Real 1,200 x 1,200dpi is achieved with the controller data processing resolution and engine output resolution to give highly precise and razor sharp print quality.

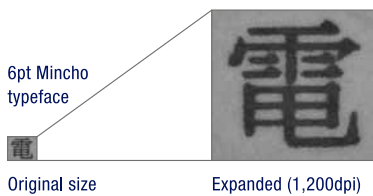

Security Print to protect highly confidential documents

When printing a highly confidential document, the user can set the document to require ID verification on the control panel before printing can be carried out for a file saved in the system. This helps prevent unauthorised access of confidential documents

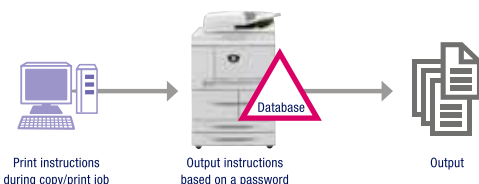

Watermark (Hidden Text Print Function) to prevent unauthorised copying

Watermark printing can be incorporated to help prevent leakage of confidential information from unauthorised print. The settings of this feature is done on the system itself and all printing requests from user PC can be incorporated with this watermark feature.

Viable when the optional Copy Management



Enhancement Kit is installed

Link with finisher for fast and efficient post-processing


Two types of finisher and a paper-folding unit are available as options to boost post-processing efficiency. "Staple Finisher" offers stapling and hole-punching features while "Booklet Finisher" provides centrebind and two-fold features in addition to stapling and hole-punching. The interposer comes as a standard feature in these two finishers. Combined with the cover insertion feature, booklets requiring different types of papers can be automatically created. In addition, with the "Z-Fold unit", folding requirements such as Z-folding and threefolding, as well as other folding and binding jobs can now be done automatically to save manual hassle.



Staple Finisher


- Up to 100 sheets* of A4-sized paper can be stapled.
- The hole-puncher can punch 2 or 4 holes as standard (3 hole imperial, optional).
- Up to 3,000* sheets of papers can be stacked.

*80gsm

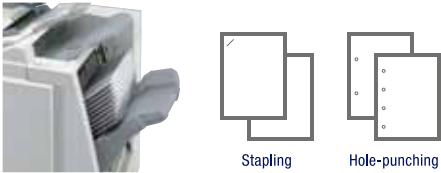

Booklet Finisher

- Centre-stapling, two-fold functions are available besides stapling and hole-punching.
- A booklet of up to 15 sheets, 60 pages can be created (based on 60-90gsm, not-stapled).

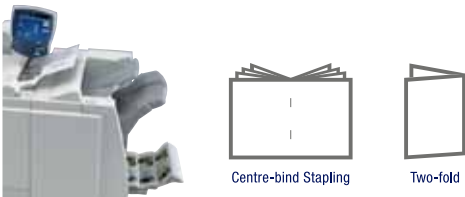

Interposer

- Standard feature on Staple Finisher and Booklet Finisher.
- Booklet requiring different types of papers (colour/monochrome mixed document) can be created with the cover insertion feature.




Z-Fold Unit (Engineering Fold)

- Convenient Z-folding can be done, for example, when binding A3-size documents as A4-size documents.



Three-folding

- Ease of using three-fold to create Direct Mail and so forth and it comes with two types of support, three-fold inside and three-fold outside.



Specifications

COPIER		
Copier Type	Console	
Scanning Resolution	600 x 600 dpi (23.6 x 23.6 dots/mm)	
Output Resolution	600 x 600 dpi (23.6 x 23.6 dots/mm)	
Gradation	256 gradation	
Warm-up Time	≤6 minutes (When the room temperature is at 20°C)	
Copy Document	Maximum: 297 x 432mm (A3, 11 x 17") for both sheets and books	
Copy (sheet) size	Maximum	A3/12.6" x 19.2" (330 x 488mm)
	Minimum	A5 (A6 from the Bypass Tray)
	Image Loss width	First 5mm or less, last 5mm or less, and top/front 5mm or less
	Tray 1/2	8.5" x 11" LEF*, 7.25" x 10.5" LEF*, A4 LEF, B5 LEF*
	Tray 3/4	Standard: 13" x 18", 12.6" x 19.2"#, 11" x 17", 8.5" x 14", 8.5" x 13", 8.5" x 11" SEF/LEF, A3, B4, A4 SEF/LEF, B5 SEF, A5 SEF Non-Standard: X direction: 182mm – 488mm; Y direction: 140mm – 330mm
Paper Weight**	Tray 1-4	52g/m ² – 216g/m ²
	Tray 5 (Bypass)	52g/m ² – 253g/m ²
First Copy Output Time	3 seconds (IOT Exit, No Finisher)	
Magnification	Size for Size	1:1 ±0.7%
	Fixed	1:0.250, 1:0.500, 1:0.612, 1:0.707, 1:0.816, 1:0.866, 1:1, 1:1.154, 1:1.225, 1:1.414, 1:1.632, 1:2.000, 1:4.000
	Variable	1:0.25 – 1:4.00 (in 1% increment)
Continuous Copy Speed [Ⓐ]	B5 LEF	95 ipm
	A4 LEF	90 ipm
	B5/A4	64 ipm
	B4	56 ipm
	A3	50 ipm
Paper Capacity (80g/m ²)	Standard	1,100 + 1,600 + 550 x 2 Trays + Bypass 250
	Option	High Capacity Feeder: 2,000 sheets x 2 Trays, SRA3 High Capacity Feeder: 2,100 sheets x 1 Tray
	Paper Capacity	Maximum: 8,050 sheets
Continuous Copy Count	9,999 sheets	
Power Supply	AC220 – 240V ±10%, 15A, 50/60Hz	
Power Consumption	2.8kW (220V), 2.9kW(230V), 3.1kW (240V)	
Machine Size	1,285(W) x 781(D) x 1,455(H) mm	
Machine Weight	271kg	
Space Requirements	With Finisher and Extended Bypass Tray	2,299(W) x 781(D) mm

- * Paper guide adjustment by our engineers is required. Use of Fuji Xerox papers highly recommended
- Paper guide adjustment and additional settings by our engineers are required
- # Use of Fuji Xerox papers highly recommended
- Ⓐ Speed may be reduced due to image quality adjustment
- Ⓞ Performance may vary for supported coated and special stocks.

NETWORK PRINTER		
Type	Built-in Printer	
Print Speed	Equivalent to copy speed	
Resolution	Output	Standard: 600 x 600dpi; High Resolution: 1,200 x 1,200dpi
PDL	PCLXL, PCL5, PostScript®	
Protocol	TCP/IP (lpd, Port9100, IPP), SMB, Novell® NetWare® (IPX/SPX), EtherTalk®*	
Client Operating System†	PCL	Windows® 2000/XP®/Windows Server™ 2003/VISTA (x86/x64 mini driver)
	PS Windows	Windows® 2000/XP®/Windows Server™ 2003/VISTA : MSPScript 5.2 (x86/x64: PPD + Inf: online)
	PS Mac	Mac OS X 10.3.9 - 10.4.10 (except 10.4.7); Plug-in Driver 8.6 - 9.2.2; Adobe PS 8.8: PPD only
Fonts	Standard	PCL: 81 fonts, PS: 136 fonts
Emulation	TIFF, FX PDF, HPGL2	
Interface	Standard	Ethernet 100BASE-TX/10BASE-T
	Option	USB 2.0 [‡]

- * Supports Mac OS 8.6-9.2.2, Mac OS X 10.3.9-10.4.10 (except 10.4.7)
- † Please visit Fuji Xerox website for the latest print drivers
- # USB 2.0 supports Windows® 2000/XP®/Windows Server™ 2003 and Mac OS 8.6-9.2.2, Mac OS X 10.3.9-10.4.10

NETWORK SCANNER		
Type	Monochrome / Colour Scanner	
Original Paper Size	Same as Copier	
Resolution	600 x 600dpi, 400 x 400dpi, 300 x 300dpi, 200 x 200dpi	
Tone	Monochrome: 1 bit input, 1 bit output; Colour: RGB 10 bits input, 8 bits output	
Scanning Speed	Monochrome: 100 ipm*, Colour: 50ipm (single-sided) (ITU-T No.1 Chart A4 LEF, 200dpi, to Mailbox)	
Interface	Ethernet 100BASE-TX/10BASE-T	
Scan to Mailbox	Protocol	TCP/IP (Salutation, HTTP)
	Format	Monochrome Binary: TIFF; DocuWorks Colour/Grey Scale: TIFF, JPEG, DocuWorks
	Driver	TWAIN (Salutation)
Scan to SMB/FTP	Client Operating System†	Windows® 2000/XP® and Windows Server™ 2003
	Protocol	TCP/IP (SMB, FTP)
Scan to Mail	Operating System†	Windows® 2000/XP®/ Windows Server™ 2003/VISTA, Mac OS X 10.3.9 - 10.4.10 (except 10.4.7),
	Format	Monochrome Binary: TIFF (Compression Method: MH/MMR), XDW, PDF Colour/Grey Scale: TIFF (Compression Method: JPEG) JPEG, XDW, PDF
Scan to Mail	Protocol	TCP/IP (SMTP)
	Format	Monochrome Binary: TIFF (Compression Method: MH/MMR), XDW, PDF Colour/Grey Scale: TIFF (Compression Method: JPEG) JPEG, XDW, PDF

- * Scanning speed differs depending on originals
- † Please visit Fuji Xerox website for the latest Scan drivers
- # Only support SMB
- Ⓞ Only support FTP

Specifications

DUPLIX AUTOMATIC DOCUMENT FEEDER		
Type	Duplex Auto Document Feeder	
Original Paper Size	Maximum: A3; Minimum: A5	
Paper Weight	38g/m ² – 200g/m ² (One Pass Both Sides Mode: 50g/m ² – 128g/m ²)	
Paper Capacity	(80g/m ²) 250 sheets	
Images Per Minute	90 ipm (1 pass duplex, A4 LEF)	
HIGH CAPACITY FEEDER (optional)		
Type	SRA3 1 Tray HCF	A4 2Tray HCF
Paper Size	B5 LEF, 7.25" x 10.5", 8" x 10", Letter (8.5" x 11"), Letter LEF, A4 SEF, A4 LEF, 8.5" x 13", 8.5" x 14", B4, A3, 11" x 17", 12" x 18", 12.6" x 17.7", 12.6" x 19.2", 13" x 18", 13" x 19"	SRA4 [®] , A4 LEF, B5 LEF [®] , Letter LEF, 7.25" x 10.5" [®]
Paper Weight	52g/m ² – 253g/m ²	52g/m ² – 216g/m ²
Paper Capacity (80g/m ²)	2,100 sheets x 1 tray	2,000 sheets x 2 tray
Machine Size/Weight	1020(W) x 801(D) x 992(H) mm/111kg	600(W) x 694(D) x 990(H) mm/72kg
STAPLE FINISHER / BOOKLET FINISHER		
Type	Staple Finisher	Booklet Finisher
Tray Type	Top Tray	Sort/Stack
	Finisher Tray	Sort with Off Set/Stack with Off Set
	Booklet Tray	Sort/Stack
Paper Size	Top Tray	Maximum: 330 x 482mm, 304 x 488mm; Minimum: A6
	Finisher Tray	Maximum: 330 x 482mm, 304 x 488mm; Minimum: B5
	Booklet Tray	Maximum: 330 x 457mm, A3; Minimum: Letter, A4
Applicable Paper	Top Tray	52g/m ² – 253g/m ²
	Finisher Tray	52g/m ² – 216g/m ²
	Booklet Tray	60g/m ² – 90g/m ²

STAPLE FINISHER/BOOKLET FINISHER			
Type		Staple Finisher	Booklet Finisher
Tray Capacity (80g/m ²)	Top Tray	500 sheets	500 sheets
	Finisher Tray	3,000 sheets, 200 sets*	2,000 sheets, 200 sets*
	Booklet Tray	–	20 sets with tray up / unlimited with tray down
Stapling	Maximum Number	100 sheets* (52g/m ² – 90g/m ²)	
	Paper Size	Maximum: 279 x 432mm, A3; Minimum: B5 LEF	
	Position	Single, Double	
Punching	Paper Size	Maximum: 279 x 431mm, A3; Minimum: B5 LEF (2-holes), A4 LEF (4-holes)	
	Punching Holes	2-holes, 4-holes (Option: 3-holes)	
Booklet Making /Folding	Maximum Paper Count	–	Booklet with stapling:15 sheets Booklet without stapling:5 sheets
	Paper Size	–	Maximum: 330 x 457mm, A3; Minimum: Letter, A4
	Paper Type	–	Booklet: 60g/m ² – 90g/m ² ; Bi-fold: 60g/m ² – 105g/m ²
Folding	Z-fold	Paper Size: 279 x 432mm, A3, B4, Paper Weight: 60g/m ² – 90g/m ²	
	Three-fold	Paper Size: A4, Letter, Paper Weight: 60g/m ² – 90g/m ²	
Interposer ^ø	Paper Size/Weight	Maximum: 279 x 432mm, A3; Minimum: B5 LEF; 60g/m ² – 220g/m ²	
	Capacity	(80g/m ²) 180 sheets	
Dimension/weight	Without Folder	1,050(W) x 725(D) x 1,165(H) mm/105kg	1,055(W) x 725(D) x 1,165(H) mm/135kg
	With Folder	1,250(W) x 725(D) x 1,165(H) mm/145kg	1,255(W) x 725(D) x 1,250(H) mm/175kg

- * ONLY Letter LEF, A4 LEF, 8" x 10" LEF, B5 LEF, 7.25" x 10.5" LEF, 16K LEF are supported. Capacity is reduced to 1,500 sheets or 100 sets if other sizes are used
- Maximum paper count for stapling larger sized papers than A4 and 8.5" x 11" is 65 sheets
- ø Unable to print on papers inserted from the Interposer

Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances please refer to the Customer Expectation Document.

13 14 12

www.fujixerox.com.au

Fuji Xerox Australia Pty Ltd. ABN 63 000 341 819.
101 Waterloo Rd, Macquarie Park NSW 2113.
Phone (02) 9856 5000 Fax (02) 9856 5003

© 2010 Fuji Xerox Co., Ltd. All rights reserved. Xerox®, the sphere of connectivity design, DocuCentre, ApeosWare EasyAdmin, DocuWorks are registered trademarks of Xerox Corporation in the U.S. and/or other countries. Other trademarks are the property of their respective owners. Whilst the information is correct at the time of printing, Fuji Xerox Australia Pty Ltd reserves the right to change the specifications or withdraw supply of the equipment/software described herein without notice. Quality Endorsed Company ISO 9001:2000. QEC1950/01 SAI Global, Certified Environmental Management ISO 14001:2004. C10094 SAI Global.

Printed in Australia, August 2010.



Protecting the environment is a fundamental component of our company's commitment to corporate citizenship. At Fuji Xerox Australia, we supply products that have been designed with both our customers and the environment in mind. As a world leader in the development of parts and components Remanufacturing Programs, we have made Eco-Manufacturing an integral part of our business.

All our sites have achieved ISO 14001:2004 Environmental Management System Certification, as a demonstration of our commitment to protecting the environment.